


6000 counts TRUE-RMS Digital clamp meter

- 600A Digital Clamp Meter
- Non-Contact AC Voltage Detection
- Flashlight for Dark Area
- 10000 Counts(CM83B and CM83C)
- True-RMS (CM83B and CM83C)
- Inrush Current for starting engine(CM83C)

CE  **CAT III 600V**

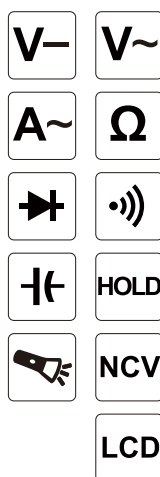

Model	CM83A+	CM83B	CM83C	Accuracy
DC Voltage	400mV/4V/40V/400V/600V	100V/600V	100V/600V	± (0.8%+3)
AC Voltage	4V/40V/400V/600V	100V/600V	100V/600V	± (1.0%+4)
AC Current	4A/40A/600A ± (2.5%+5)	6A/60A/600A	6A/60A/600A	± (3.0%+6)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ/40MΩ	1kΩ/10kΩ/100kΩ/1MΩ/10MΩ	100Ω/1kΩ/10kΩ/100kΩ/1MΩ/10MΩ/100MΩ	± (1.0%+3)
Capacitance	4nF/40nF/400nF/4uF/40uF/400uF/4mF	600uF/6000uF	10nF/100nF/1uF/10uF/100uF/1mF/60mF	± (3.5%+5)
°C/°F	-	-	-20°C~1000°C/-4°F~1832°F	± (2.0%+2)

Feature	
Continuity Buzzer	<30Ω
Jaw Opening	Φ32mm
Diode	√
Data Hold	√
Backlight	√
Flashlight	√
Auto Power off	√
NCV	√
Low Battery Indication	Lower than 2.4V

General	
Batteries	2×1.5V AAA
Size	200×75×30 (mm)
Weight	About 226g
Safety Level	EN61010-2-032, CAT III 600V
Standard Accessories	Digital Clamp Meter-Probe-Carrying Bag-Batteries-User Manual-Color Box