

71907 CD/P4A

Super-precision, high-capacity, single row angular contact ball bearing

These super-precision, high-capacity, single row angular contact ball bearings, with 15° contact angle, accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They are designed to accommodate heavy loads at relatively high speeds under low to moderate operating temperatures.

- Very high running accuracy
- Very high load carrying capacity
- Relatively high speed and stiffness

Overview

Dimensions

Bore diameter	35 mm
Outside diameter	55 mm
Width	10 mm
Contact angle	15 °

Performance

Basic dynamic load rating	9.75 kN
Basic static load rating	6.55 kN
Attainable speed for grease lubrication	26 000 r/min
Attainable speed for oil-air lubrication	40 000 r/min

Properties


Contact type	Normal contact (two-point contact)
Number of rows	1
Ring type	One-piece inner and outer rings
Design	High-capacity D
Universal matching bearing	No
Matched arrangement	No
Matched condition (axial clearance/ preload)	Not applicable
Tolerance class	P4A
Material, bearing	Bearing steel
Coating	Without
Sealing	Without
Lubricant	None
Indicative carbon footprint for new product	0.27 kg CO_2e

Logistics

Product net weight	0.076 kg
eClass code	23-05-08-04
UNSPSC code	31171531


Technical specification


Universal matching bearing(s)	No

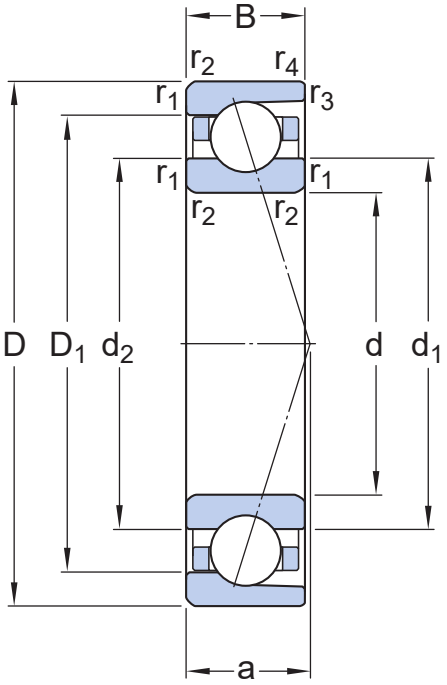

Dimensions

d	35 mm	Bore diameter
D	55 mm	Outside diameter
B	10 mm	Width
d_1	41.6 mm	Shoulder diameter of inner ring (large side face)
d_2	41.6 mm	Shoulder diameter of inner ring (small side face)
D_1	48.4 mm	Shoulder diameter of outer ring (large side face)
$r_{1,2}$	min. 0.6 mm	Chamfer dimension
$r_{3,4}$	min. 0.3 mm	Chamfer dimension
a	11.1 mm	Distance from side face to pressure point

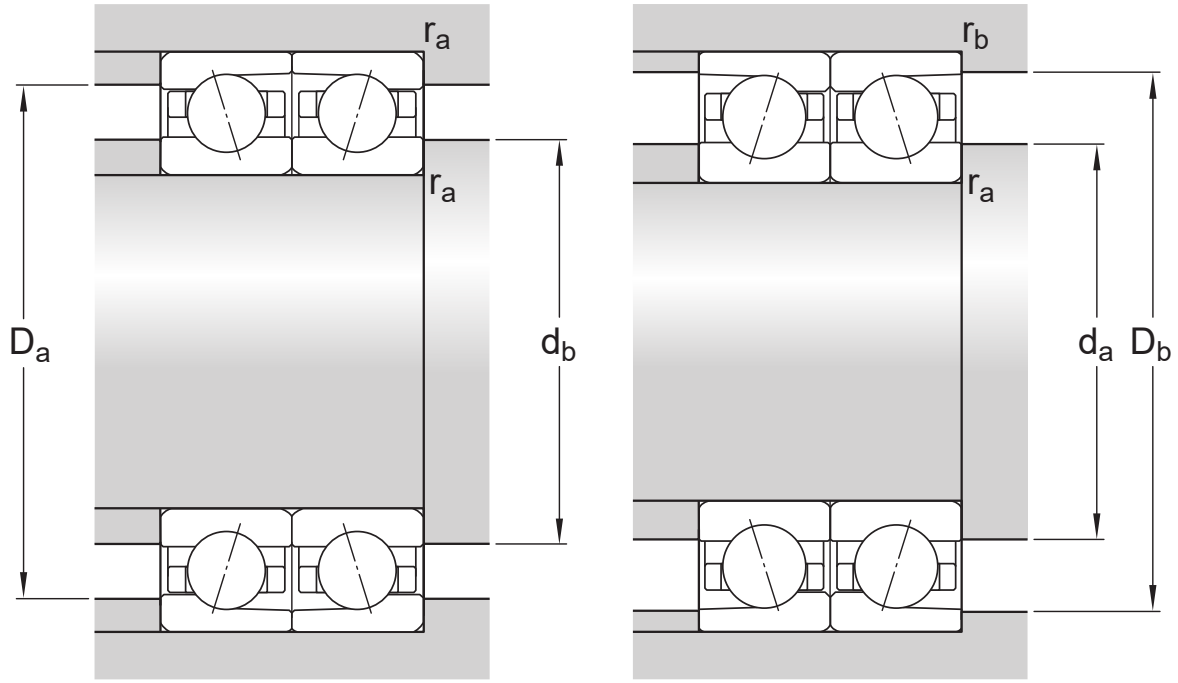

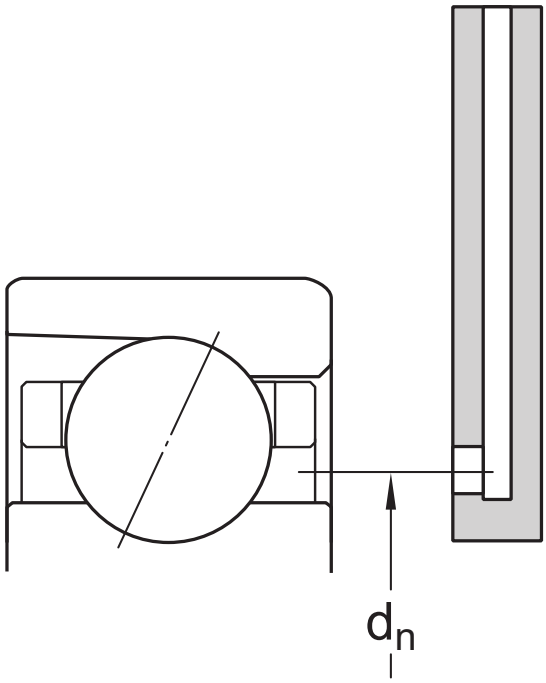

Abutment dimensions

d_a	min. 38.2 mm	Diameter of shaft abutment
d_b	min. 38.2 mm	Diameter of shaft abutment
D_a	max. 51.8 mm	Diameter of housing abutment
D_b	max. 53.6 mm	Diameter of housing abutment
r_a	max. 0.6 mm	Radius of fillet
r_b	max. 0.3 mm	Radius of fillet
d_n	43 mm	Position of oil nozzle

Calculation data

Basic dynamic load rating	C	9.75 kN
Basic static load rating	C_0	6.55 kN
Fatigue load limit	P_u	0.275 kN
Attainable speed for grease lubrication		26 000 r/min
Attainable speed for oil-air lubrication		40 000 r/min
Contact angle	α	15 °
Ball diameter	D_w	5.556 mm
Number of rows	i	1
Number of balls (per bearing)	z	21
Reference grease quantity (per bearing)	G_{ref}	0.93 cm^3

PRELOAD AND STIFFNESS (BACK-TO-BACK, FACE-TO-FACE)

Preload, class A	G_A	35 N
Axial stiffnes for preload A (sets of two brgs back to back or face to face)		32 N/µm
Preload, class B	G_B	70 N
Axial stiffness for preload B (sets of two brgs back-to-back or face-to-face)		42 N/µm
Preload, class C	G_C	140 N
Axial stiffness for preload C (sets of two brgs back-to-back or face-to-face)		58 N/µm
Preload, class D	G_D	280 N
Axial stiffness for preload D (sets of two brgs back-to-back or face-to-face)		82 N/µm

CORRECTION FACTORS FOR PRELOAD CALCULATION

Correction factor dependent on bearing series and size	f	1.1
Correction factor dependent on contact angle	f_1	1
Correction factor, preload class A	f_{2A}	1
Correction factor, preload class B	f_{2B}	1
Correction factor, preload class C	f_{2C}	1.1
Correction factor, preload class D	f_{2D}	1.2

Correction factor for hybrid bearings	f_{HC}	1

FACTORS FOR EQUIVALENT BEARING LOAD CALCULATION

Calculation factor for equivalent loads	f_0	10.4
Additional factors for equivalent loads		Refer to Notes 1 and 2 below

Compatible products

Aftermarket replacement

Super-precision, high-capacity, universally matchable single row angular contact ball bearing	71907 CDGA/P4A

Terms of use